

KENAI™

EcoProMax

The Ultimate Whole House Water Treatment System

For your comfort, convenience and safety

The Kenai EcoProMax leverages proven water treatment technology, with media and components meticulously configured to optimize water quality. It features an upflow regeneration process, separated media compartments, sophisticated microprocessor controls, and premium quality media. These advancements ensure highly effective, efficient, long-lasting, and reliable water treatment for your entire home.

- Intelligent digital microprocessor controls system operations
- Bi-metallic compound converts chlorine to safer, less harmful chlorides and helps to inhibit microbial growth (KDF)
- Catalytic carbon reduces chlorine and chloramine
- Durable corrosion-resistant construction
- Built-in diagnostics ensures consistent, superior quality water
- Jacketed and weather protected
- Sold and serviced by certified professionals
- Wi-fi compatible with the Charger Total Connect Pro



Applications: Chlorine, Heavy Metal Removal and Bacteria

This bi-metallic media is NSF certified.



American Made components

Start enjoying the Kenai EcoProMax difference today.

Contact a Kenai authorized dealer to install a EcoProMax Professional Series Water Treatment System and start enjoying all the benefits of this whole home powerhouse.

Why do I need soft water?


Hard water is hard on you, your home and your wallet.



- Reduced effectiveness of soaps and detergents causing scratchy towels, spots on glassware, & unwanted soap residue
- Unsightly stains and residue
- Mineral buildup inside your water heater and other water-using home appliances

The EcoProMax Difference

This advanced softening system has features which position it in a class all its own.

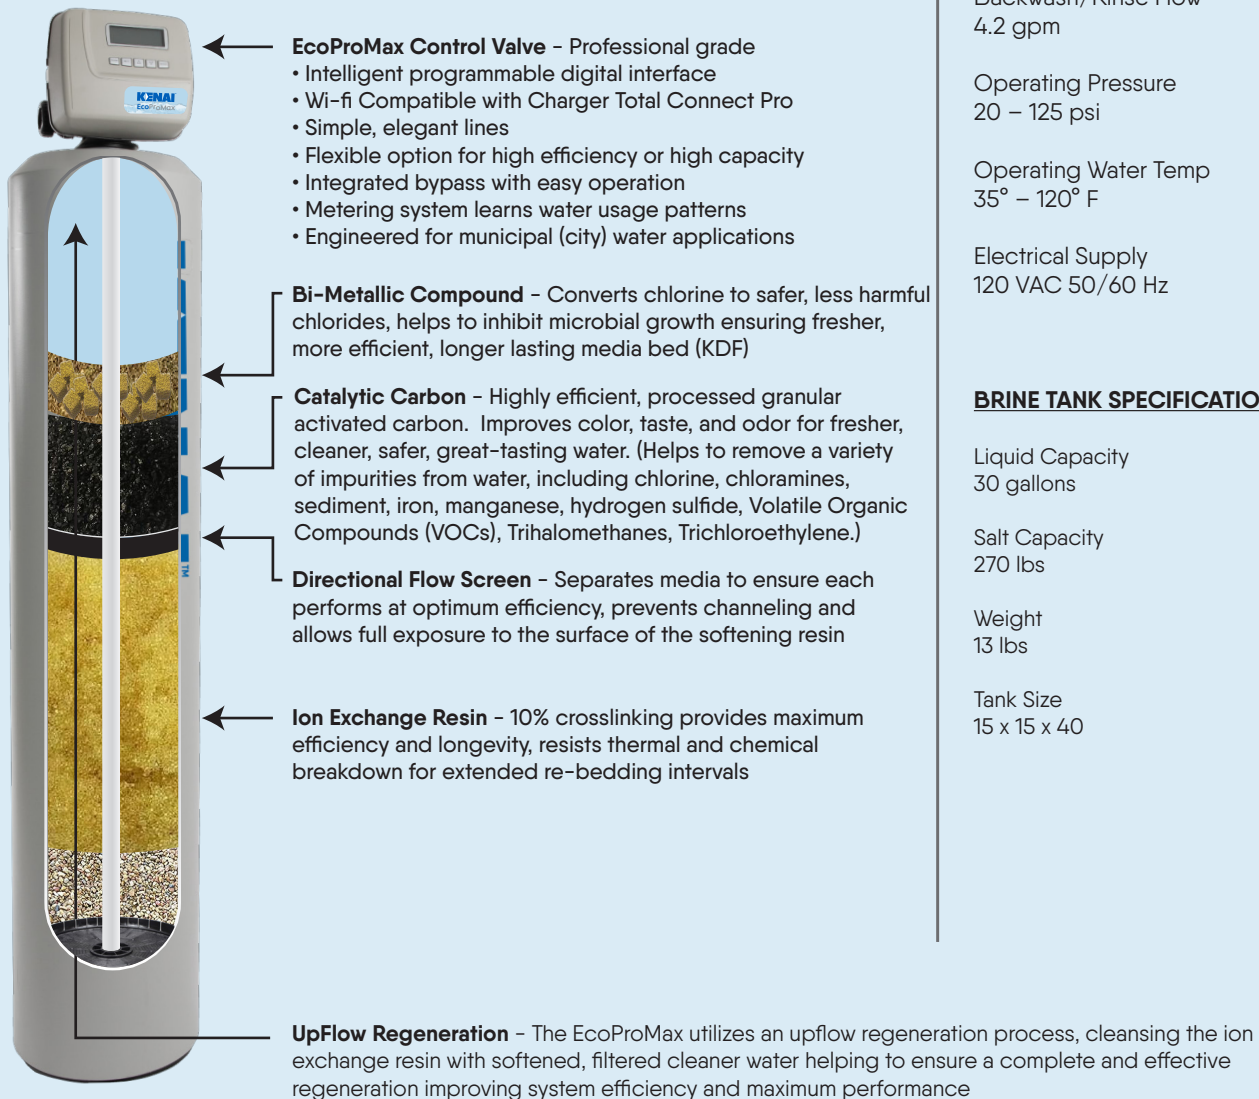

KENAI[™]
EcoProMax

SPECIFICATIONS

Plumbing Connections
¾", 1", 1 ¼", or 1.5" NPT

Drain Connection
5/8" Polytubing

Brine Connection
3/8" QC

System Flow Rates
7.5 gpm

Backwash/Rinse Flow
4.2 gpm

Operating Pressure
20 – 125 psi

Operating Water Temp
35° – 120° F

Electrical Supply
120 VAC 50/60 Hz

BRINE TANK SPECIFICATIONS

Liquid Capacity
30 gallons

Salt Capacity
270 lbs

Weight
13 lbs

Tank Size
15 x 15 x 40

